

# PD-USB-DP60

## PoE to USB-C® Power and Data Adapter



### Summary

The Microchip PoE to USB-C® adapter connects IoT devices with a USB-C connector to Power over Ethernet (PoE) networks, enabling users to leverage the advantages of PoE and USB-C technologies. The PD-USB-DP60 is a PoE to USB-C adapter that provides both power and data to USB-C hosts and power to USB-C Powered Devices.

The PD-USB-DP60 adapter enables flexible installation of USB-C devices, removes the need for a close power outlet and resolves the issue of limited USB cable length. The PoE source can be up to 328 ft/100m from the location of the USB-C device. A single Ethernet cable is needed while delivering up to 60W of USB power at the output of the adapter.


The PD-USB-DP60 connects with small PCs/Next Unit of Computing (NUC), interactive information kiosks, smart monitors, tablets, laptops, cellphones, cameras and other USB-C powered devices consuming up to 60W. The adapter is compatible with USB2.0 and 3.1 and will automatically provide to the end device the exact amount of power it needs.

### Key Features

- Up to 60W output power
- Enables powering of small PCs/Next Unit of Computing (NUC), interactive information kiosks, smart monitors, tablets, laptops, cameras and other USB-C devices
- Provides power and data to USB-C Hosts
- Allows 328 ft/100m installation range
- Supports PoE switches and Injectors from 15.4W and up to 90W
- Plug-and-play USB-C power, no configuration is needed, simple to use

### Software Support

- Windows: Vista/Windows 7/Windows 8/Windows 10/Windows 11
- Linux: Available since the 4.3 Kernel
- Android: When Long Term Support kernel is present
- OS® X and mac® OS: 10.10, 10.11, 10.12, 10.13, 10.14 (Mojave), 10.15 (Catalina), 11.4 (Big Sur)

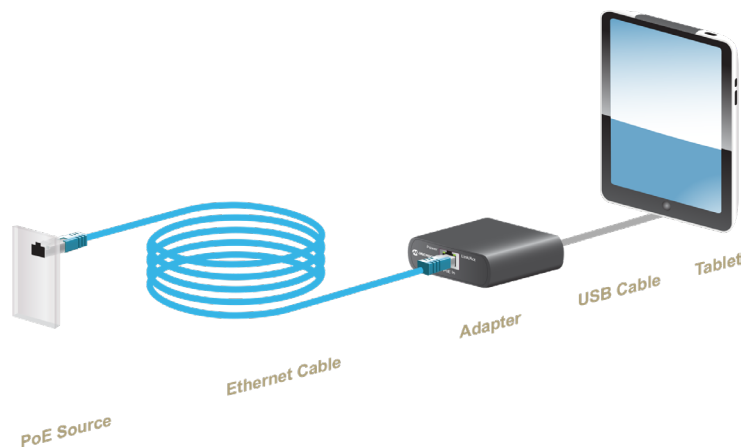

Microchip PoE to USB-C adapter connects USB-C devices to the PoE network and converts both power and data into a single USB-C connector.

## Specifications

Feature	Description
Number of ports	1 PoE input, 1 USB-C Output
Data Rates	10/100/1000 Mbps
PoE Input	PoE up to 90W (42–57 Vdc)
USB-C Output	Data: USB 2.0, USB 3.1 Gen 1 Power: up to 60W (5 Vdc/3A, 9 Vdc/3A, 15 Vdc/3A, 20 Vdc/3A)
Dimensions	22.4 mm (H) × 66.8 mm (W) × 105.2 mm (L) 0.88 in. (H) × 2.63 in. (W) × 4.14 in. (L)
Weight	150g (0.33 lb)
Indicators	PoE Power: Yellow Data Link: Green VBUS (located on USB-C Cable): Green
Connections	PoE: Shielded RJ45 EIA 568A and 568B USB: USB Type-C
Environmental Conditions	Operating Ambient Temperature: 32°F to 104°F (0°C to 40°C) Operating Humidity: Max 90%, Non-Condensing Storage Temperature: -4°F to +158°F (-20°C to +70°C) Storage Humidity: Max 95%, Non-Condensing
Hazardous Substances	CE, WEEE, China RoHS
Warranty	1 year
Extended Warranty Available	No
Reliability	MTBF 150,000 hr
Electromagnetic Emission and Immunity	FCC Part 15 Class B, EN 55032 Class B, VCCI, ICES-003, EN55035

## Technical Support

For technical support, please visit the Microchip Technical Support Portal at [www.microchip.com/support](http://www.microchip.com/support)

## LAN7800 Driver

To download drivers for the LAN7800 please visit the LAN7800 WEB page: [LAN7800](#)

## Ordering Information

Product Name	Part Number	Description
PoE to USB-C® Adapter	PD-USB-DP60	PoE to USB-C Data and Power converter with 30 cm USB Type-C Cable

## About Microchip mPoE



Microchip multi-Power over Ethernet (mPoE) is a technology that powers any wired network device seamlessly and efficiently, making it the ideal solution for Ethernet-based applications. Leveraging a uniquely designed algorithm, this technology solves interoperability issues between different PoE standards and legacy solutions to provide an international network power standard. As a pioneer in PoE technology, we offer a comprehensive end-to-end portfolio of PoE solutions comprised of PoE ICs and PoE systems (midspans/injectors and switches).