

# TFT DISPLAY SPECIFICATION



**WINSTAR Display Co.,Ltd.**  
**華凌光電股份有限公司**



# Winstar Display Co., LTD

## 華凌光電股份有限公司



WEB: <https://www.winstar.com.tw> E-mail: sales@winstar.com.tw

### SPECIFICATION

**MODULE NO.: WF101KTYAPLNN0#**

### General Specifications

| Item              | Dimension                     | Unit |
|-------------------|-------------------------------|------|
| Screen Diagonal   | 10.1                          | inch |
| Number of Pixels  | 1280 x 3(R GB) x 800          | dots |
| Module dimension  | 229.34 x 148.98 x 2.85        | mm   |
| Active area       | 216.96 (H) x 135.6(V)         | mm   |
| Pixel pitch       | 0.1695 x 0.1695               | mm   |
| Display Mode      | Normally Black , Transmissive |      |
| Viewing Angle     | 80/80/80/80                   |      |
| Pixel Arrangement | R.G.B. Vertical Stripe        |      |
| TFT Drive IC      | EK79202B1 or Equivalent       |      |
| TFT Interface     | LVDS                          |      |
| Backlight Type    | LED, Normally White           |      |
| Aspect Ratio      | 16:10                         |      |
| Touch Panel       | Without Touch Panel           |      |
| Surface           | Anti-Glare                    |      |

\*Color tone slight changed by temperature and driving voltage.

## Absolute Maximum Ratings

| Item                  | Symbol | Min | Typ | Max | Unit |
|-----------------------|--------|-----|-----|-----|------|
| Operating Temperature | TOP    | -20 | —   | +70 | °C   |
| Storage Temperature   | TST    | -30 | —   | +80 | °C   |

## Electrical Characteristics

### Typical Operation Conditions

| Item          | Symbol | Values |      |      | Unit |
|---------------|--------|--------|------|------|------|
|               |        | Min.   | Typ. | MAX. |      |
| Power voltage | VCC    | 3.0    | 3.3  | 3.5  | V    |
|               | VGH    |        | 18   |      | V    |
|               | VGL    |        | -10  |      | V    |
|               | VSP    |        | 5.5  |      | V    |
|               | VSN    |        | -5.5 |      | V    |

# Interface

## Interface Connector


A 40pin connector is used for the module electronics interface. The recommended model is F62240-H1210B manufactured by Vigorconn.

| Pin No. | Symbol | I/O | Function                       | Remark                |
|---------|--------|-----|--------------------------------|-----------------------|
| 1       | NC     | -   | No connection                  |                       |
| 2       | VCC    | P   | Power Supply                   |                       |
| 3       | VCC    | P   | Power Supply                   |                       |
| 4       | NC     | -   | No connection                  |                       |
| 5       | NC     | -   | No connection                  |                       |
| 6       | NC     | -   | No connection                  |                       |
| 7       | GND    | P   | Ground                         |                       |
| 8       | Rxin0- | I   | -LVDS Differential Data Input  | R0-R5,G0              |
| 9       | Rxin0+ | I   | +LVDS Differential Data Input  |                       |
| 10      | GND    | P   | Ground                         |                       |
| 11      | Rxin1- | I   | -LVDS Differential Data Input  | G1G5,B0,B1            |
| 12      | Rxin1+ | I   | +LVDS Differential Data Input  |                       |
| 13      | GND    | P   | Ground                         |                       |
| 14      | Rxin2- | I   | -LVDS Differential Data Input  | B2-B5,HS,VS,<br>DE    |
| 15      | Rxin2+ | I   | +LVDS Differential Data Input  |                       |
| 16      | GND    | P   | Ground                         |                       |
| 17      | RxCLK- | I   | -LVDS Differential Clock Input | LVDS CLK              |
| 18      | RxCLK+ | I   | +LVDS Differential Clock Input |                       |
| 19      | GND    | P   | Ground                         |                       |
| 20      | Rxin3- | I   | -LVDS Differential Data Input  | R6,R7,G6,G7,<br>B6,B7 |
| 21      | Rxin3+ | I   | +LVDS Differential Data Input  |                       |
| 22      | GND    | P   | Ground                         |                       |
| 23      | NC     | -   | No connection                  |                       |
| 24      | NC     | -   | No connection                  |                       |
| 25      | GND    | P   | Ground                         |                       |
| 26      | NC     | -   | No connection                  |                       |
| 27      | NC     | -   | No connection                  |                       |
| 28      | NC     | -   | No connection                  |                       |
| 29      | NC     | -   | No connection                  |                       |


|    |      |   |                  |  |
|----|------|---|------------------|--|
| 30 | GND  | P | Ground           |  |
| 31 | LED- | P | LED Cathode      |  |
| 32 | LED- | P | LED Cathode      |  |
| 33 | NC   | - | No connection    |  |
| 34 | NC   | - | No connection    |  |
| 35 | VGL  | P | Gate OFF Voltage |  |
| 36 | NC   | - | No connection    |  |
| 37 | NC   | - | No connection    |  |
| 38 | VGH  | P | Gate ON Voltage  |  |
| 39 | LED+ | P | LED Anode        |  |
| 40 | LED+ | P | LED Anode        |  |

I: input, O: output, P: Power

# Contour Drawing

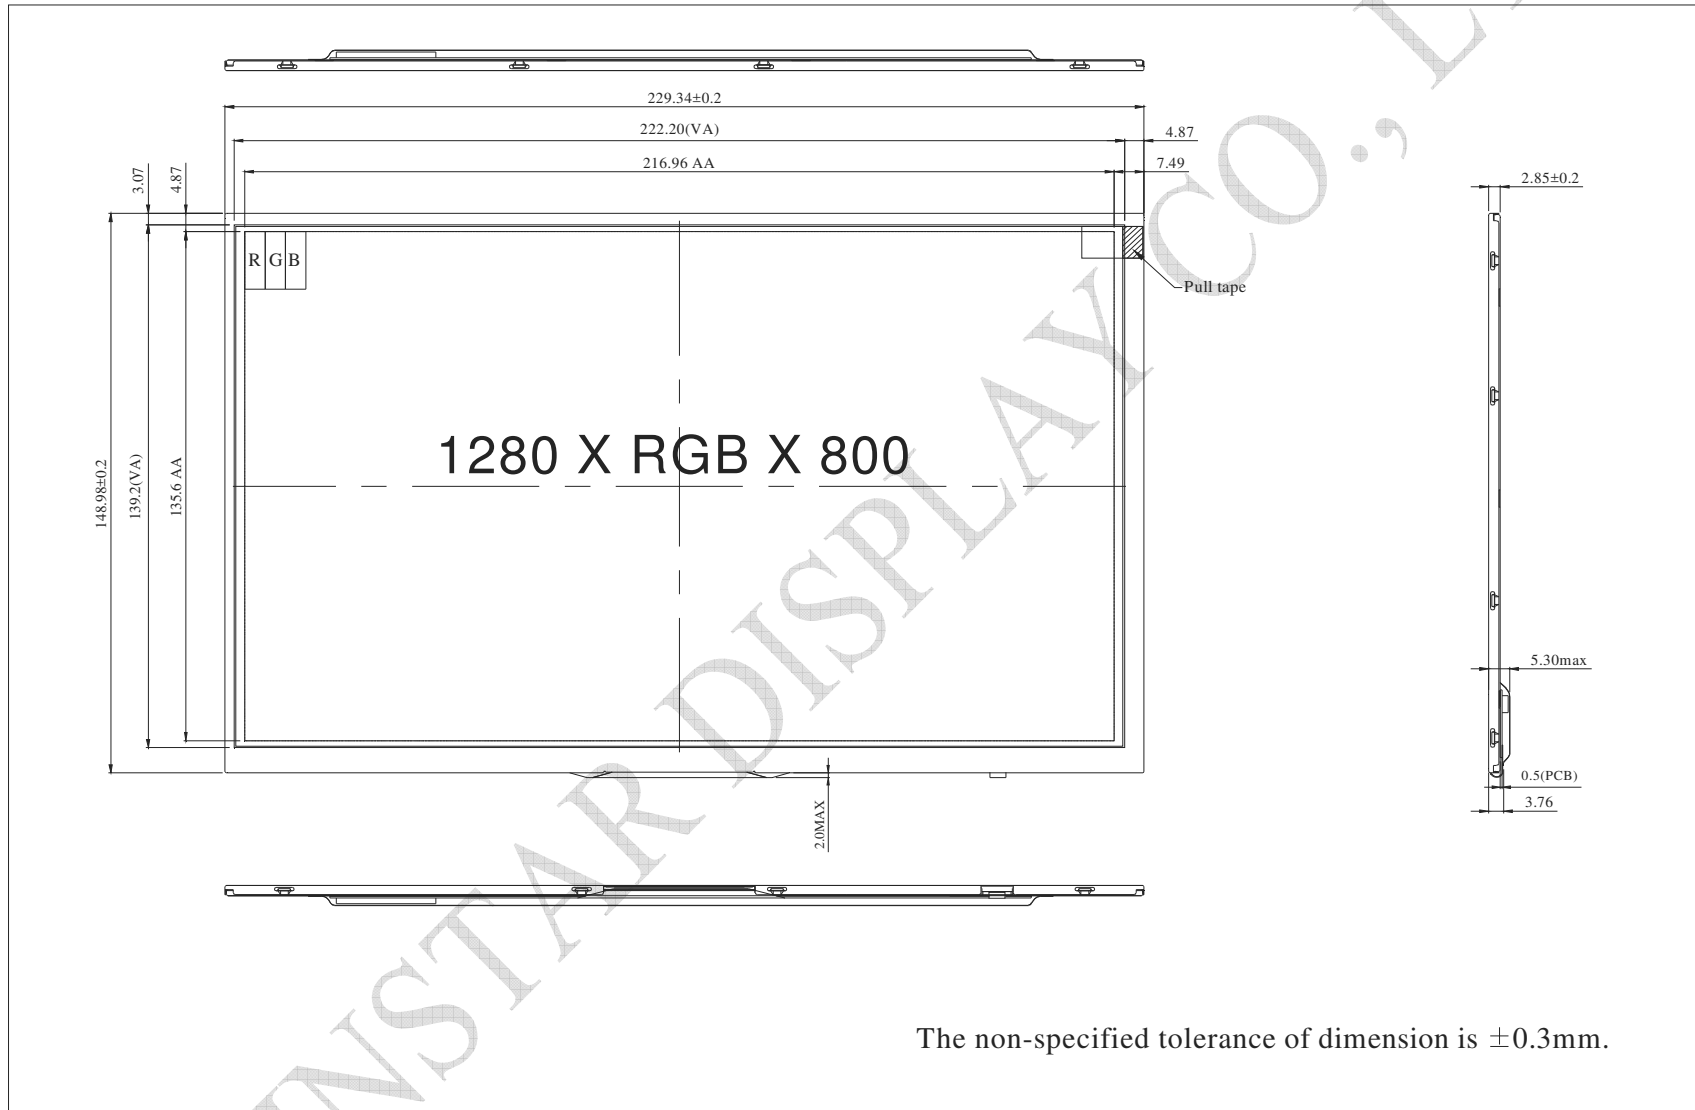

| CN1    |        |        |        |
|--------|--------|--------|--------|
| PIN NO | SYMBOL | PIN NO | SYMBOL |
| 1      | NC     | 21     | Rxin3+ |
| 2      | VCC    | 22     | GND    |
| 3      | VCC    | 23     | NC     |
| 4      | NC     | 24     | NC     |
| 5      | NC     | 25     | GND    |
| 6      | NC     | 26     | NC     |
| 7      | GND    | 27     | NC     |
| 8      | Rxin0- | 28     | NC     |
| 9      | Rxin0+ | 29     | NC     |
| 10     | GND    | 30     | GND    |
| 11     | Rxin1- | 31     | LED-   |
| 12     | Rxin1+ | 32     | LED-   |
| 13     | GND    | 33     | NC     |
| 14     | Rxin2- | 34     | NC     |
| 15     | Rxin2+ | 35     | VGL    |
| 16     | GND    | 36     | NC     |
| 17     | RxCLK- | 37     | NC     |
| 18     | RxCLK+ | 38     | VGH    |
| 19     | GND    | 39     | LED+   |
| 20     | Rxin3- | 40     | LED+   |

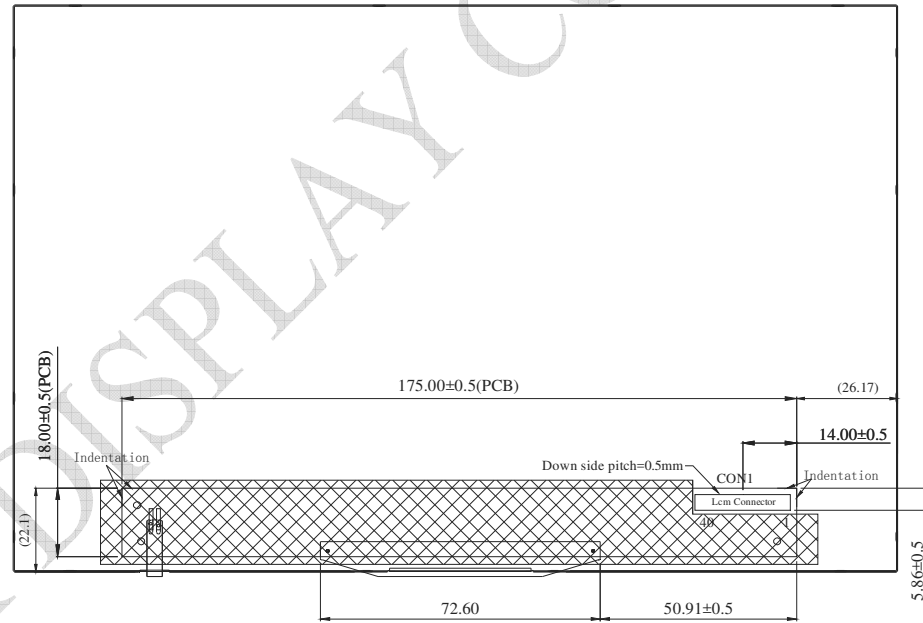

The non-specified tolerance of dimension is  $\pm 0.3$ mm.