



WINSTAR Display Co.,Ltd.
華凌光電股份有限公司

SPECIFICATION

MODULE NO.: WO13232B

General Specification

Item	Dimension	Unit
Number of dots	132 x 32	—
Module dimension	65.4 x 28.2 x 9.7	mm
View area	58.3 x 19.0	mm
Active area	52.78 x 14.38	mm
Dot size	0.38 x 0.43	mm
Dot pitch	0.40 x 0.45	mm
Duty	1/33duty , 1/6 Bias	
Backlight Type	LED	
IC	ST7567A	
Interface	I2C	

Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	T_{OP}	-20	—	+70	°C
Storage Temperature	T_{ST}	-30	—	+80	°C
Input Voltage	V_I	-0.3	—	$V_{DD}+0.3$	V
Digital Power Supply Voltage	$V_{DD}-V_{SS}$	-0.3	—	4	V
LCD Power supply voltage	V_0-XV_0	-0.3	—	18	V


Electrical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage For Logic	$V_{DD}-V_{SS}$	—	2.7	3.0	3.3	V
Supply Voltage For LCD	V_{op}	$T_a=-20^{\circ}C$	—	—	—	V
		$T_a=25^{\circ}C$	7.8	8.0	8.2	V
		$T_a=70^{\circ}C$	—	—	—	V
Input High Volt.	V_{IH}	—	$0.7 V_{DD}$	—	V_{DD}	V
Input Low Volt.	V_{IL}	—	V_{SS}	—	$0.3 V_{DD}$	V
Output High Volt.	V_{OH}	—	$0.8 V_{DD}$	—	V_{DD}	V
Output Low Volt.	V_{OL}	—	V_{SS}	—	$0.2V_{DD}$	V
Supply Current	I_{DD}	—	—	—	1.5	mA

Interface Pin Function

1	VG	VG is the LCD driving voltage for segment circuits.
2	XV0	XV0 is the LCD driving voltage for common circuits at positive frame.
3	V0	V0 is the LCD driving voltage for common circuits at negative frame.
4	VSS	Ground
5	VDD	Power supply
6	SDA	Serial Data signal
7	SCL	Serial clock input
8	RSTB	External reset pin

Contour Drawing

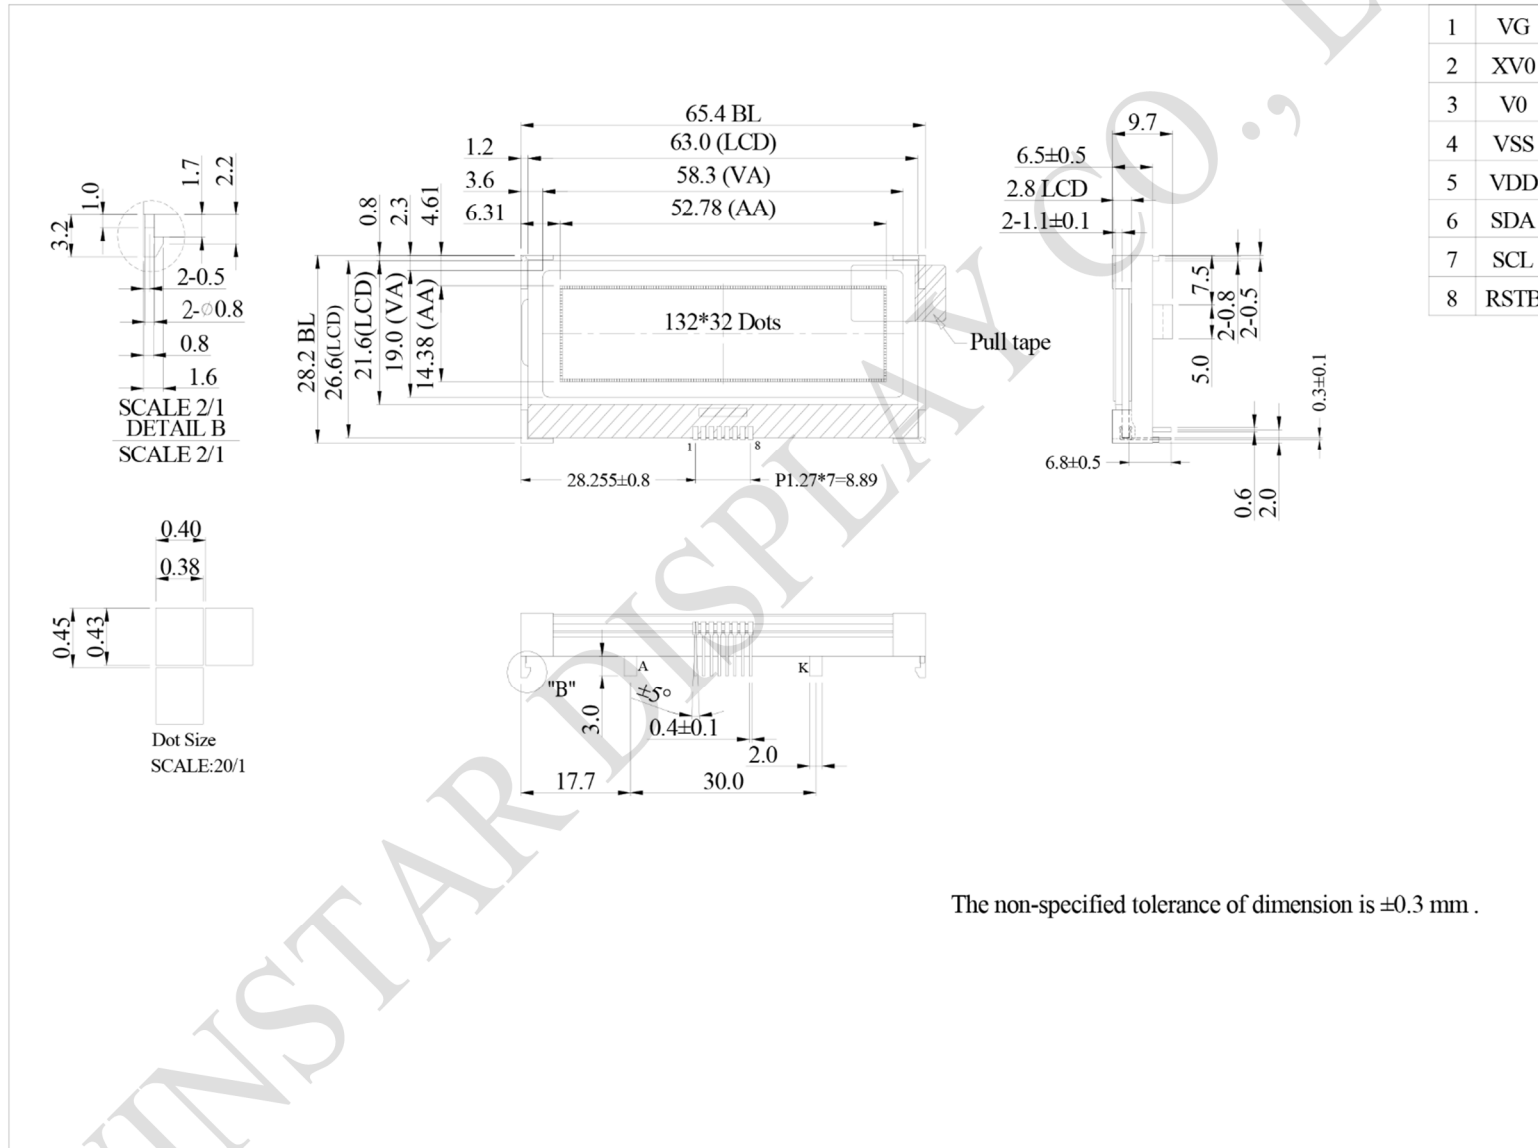

The non-specified tolerance of dimension is ±0.3 mm .